

**ROOF CONSTRUCTION:**

NEW (MIN) GAF TIMBERLINE ASPHALT SHINGLE ROOF TO MATCH EXIST'G OVER 30 LB. ASPHALT SATURATED FELT OVER PATCH AND REPAIR EXISTING ROOF AS REQUIRED FOR ADDITIONS MATCH COLOR AND STYLE OF EXISTING SHINGLES (V.P.F.)

INSTALL "SNOW & ICE" SHIELD 34" MIN. UP SLOPE. WRAP 4" MAX. ON FASCIA (BEHIND GUTTER). "SNOW & ICE" SHIELD SHALL NOT EXTEND PAST BOTTOM OF GUTTER.

INSTALL ALUMINUM FASCIA GUARDS AT ALL OVERHANGS.

NEW 5" ALUM. "K" STYLE GUTTERS AND 3" LEADERS TO BE PIPED AWAY FROM HOUSE WITH 4" PVC PIPE TO DAYLIGHT

FLASH AND COUNTERFLASH CONNECTIONS BETWEEN ROOF & WALLS. ALL FLASHING SHALL BE COPPER IF VISIBLE AND ALUMINUM IF HIDDEN. ALL VALLEY FLASHING SHALL BE CENTERED CRIMPED & SHALL EXTEND UP EACH SIDE OF SLOPE 8" MIN. FROM THE CENTER OF THE VALLEY. PROVIDE DRIP EDGE FLASHING ABOVE ALL WINDOWS & DOORS.

**FINISH CONSTRUCTION:**

PROVIDE 1" RAKE BOARD AND FASCIA BOARD AROUND PERIMETER OF HOUSE TO MATCH EXISTING.

PRIME ALL TRIM PRIOR TO INSTALLATION.

IF TJI ARE USE DFOR CANTILEVER

**ARCHITECT**

63 RIDGE ROAD  
LYNDHURST N.J.  
201-460-8710

SEAL:  
MARK A. STEFANELLI R.A.

NJ ARCH NO. 21 A1013245  
NOT VALID FOR SEALING UNLESS SIGNED AND SEALED BY ARCHITECT

PROJECT:  
ADDITION AND ALTERATION TO:  
NORTH CALDWELL N.J. 07004

ISSUED: \_\_\_\_\_ DATE: \_\_\_\_\_

SCHEMATIC DESIGN \_\_\_\_\_  
BD SET \_\_\_\_\_  
PERMIT SET \_\_\_\_\_



THESE DRAWINGS ARE THE PROPERTY OF THE ARCHITECT AND SHALL NOT BE COPIED, REPRODUCED OR ALTERED IN ANY FORM WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT

CAD FILE NAME: \_\_\_\_\_  
REVISIONS  
NO. REQUESTED BY: \_\_\_\_\_ DATE: \_\_\_\_\_

DO NOT SCALE DRAWINGS

PROJECT NAME  
**NAME**

DATE: 07/21/08  
DRAWN/CHECKED: MAS  
SCALE: AS NOTED  
PROJECT NO. 2008  
SHEET NO.

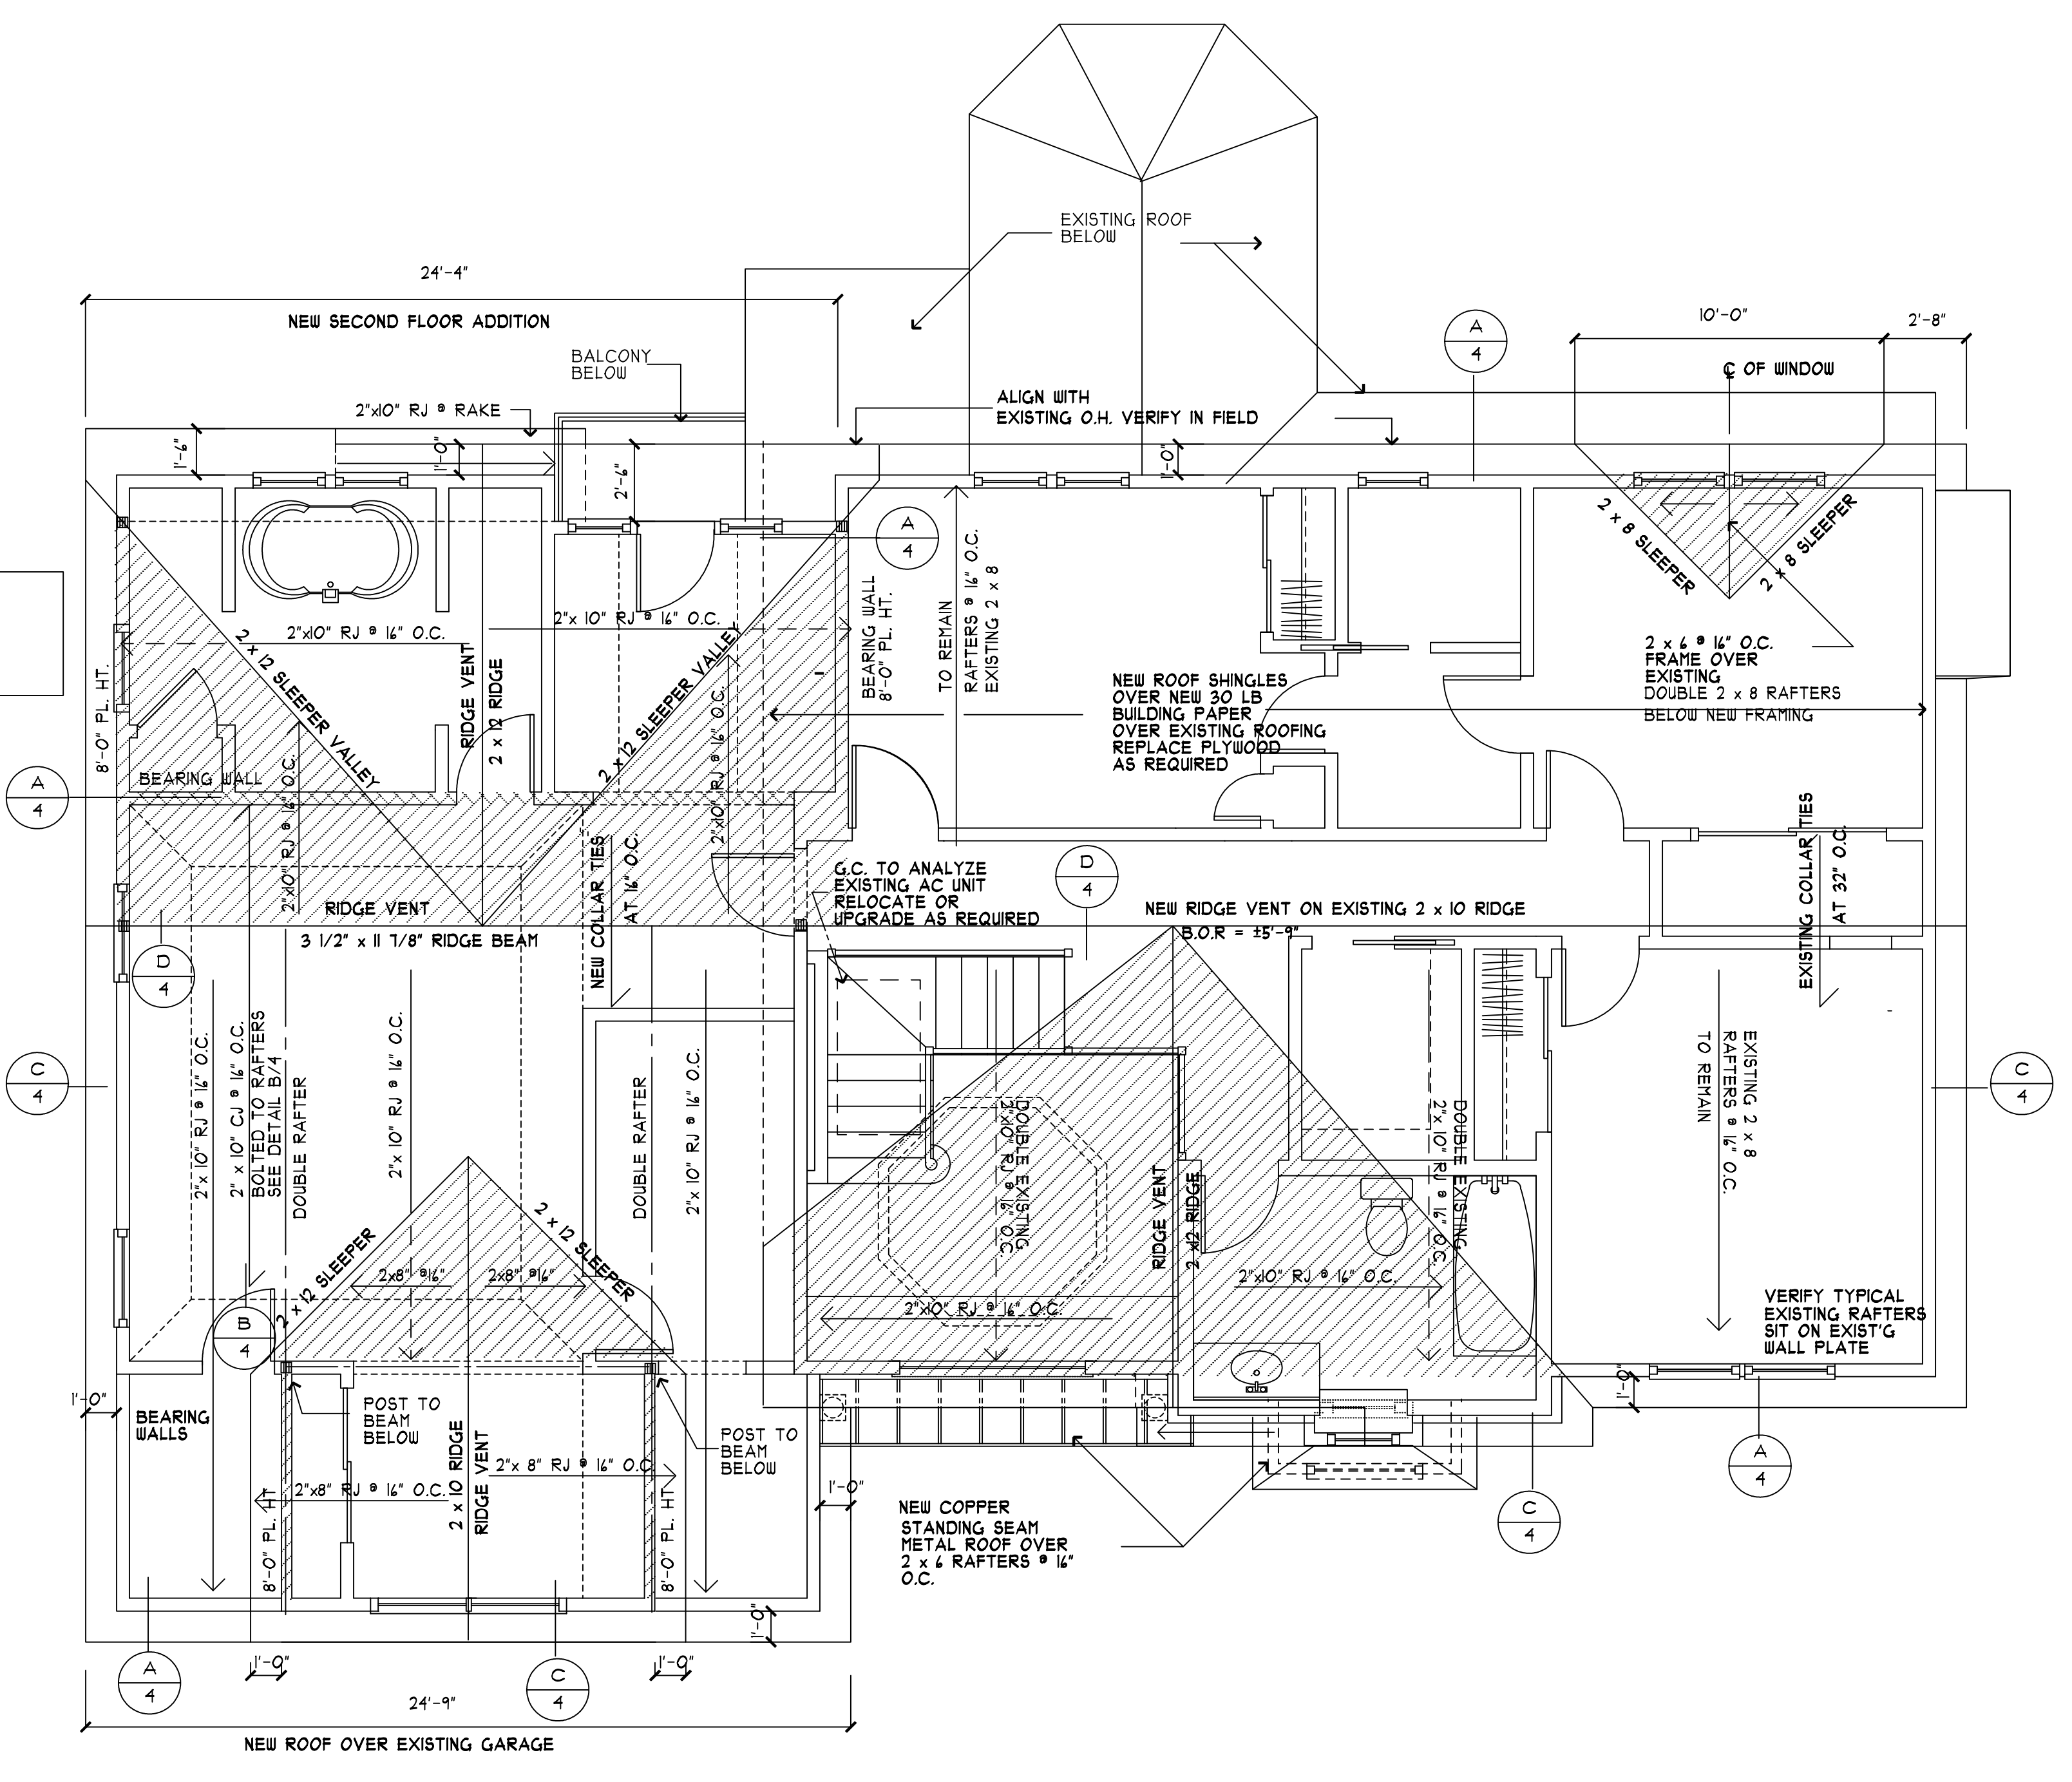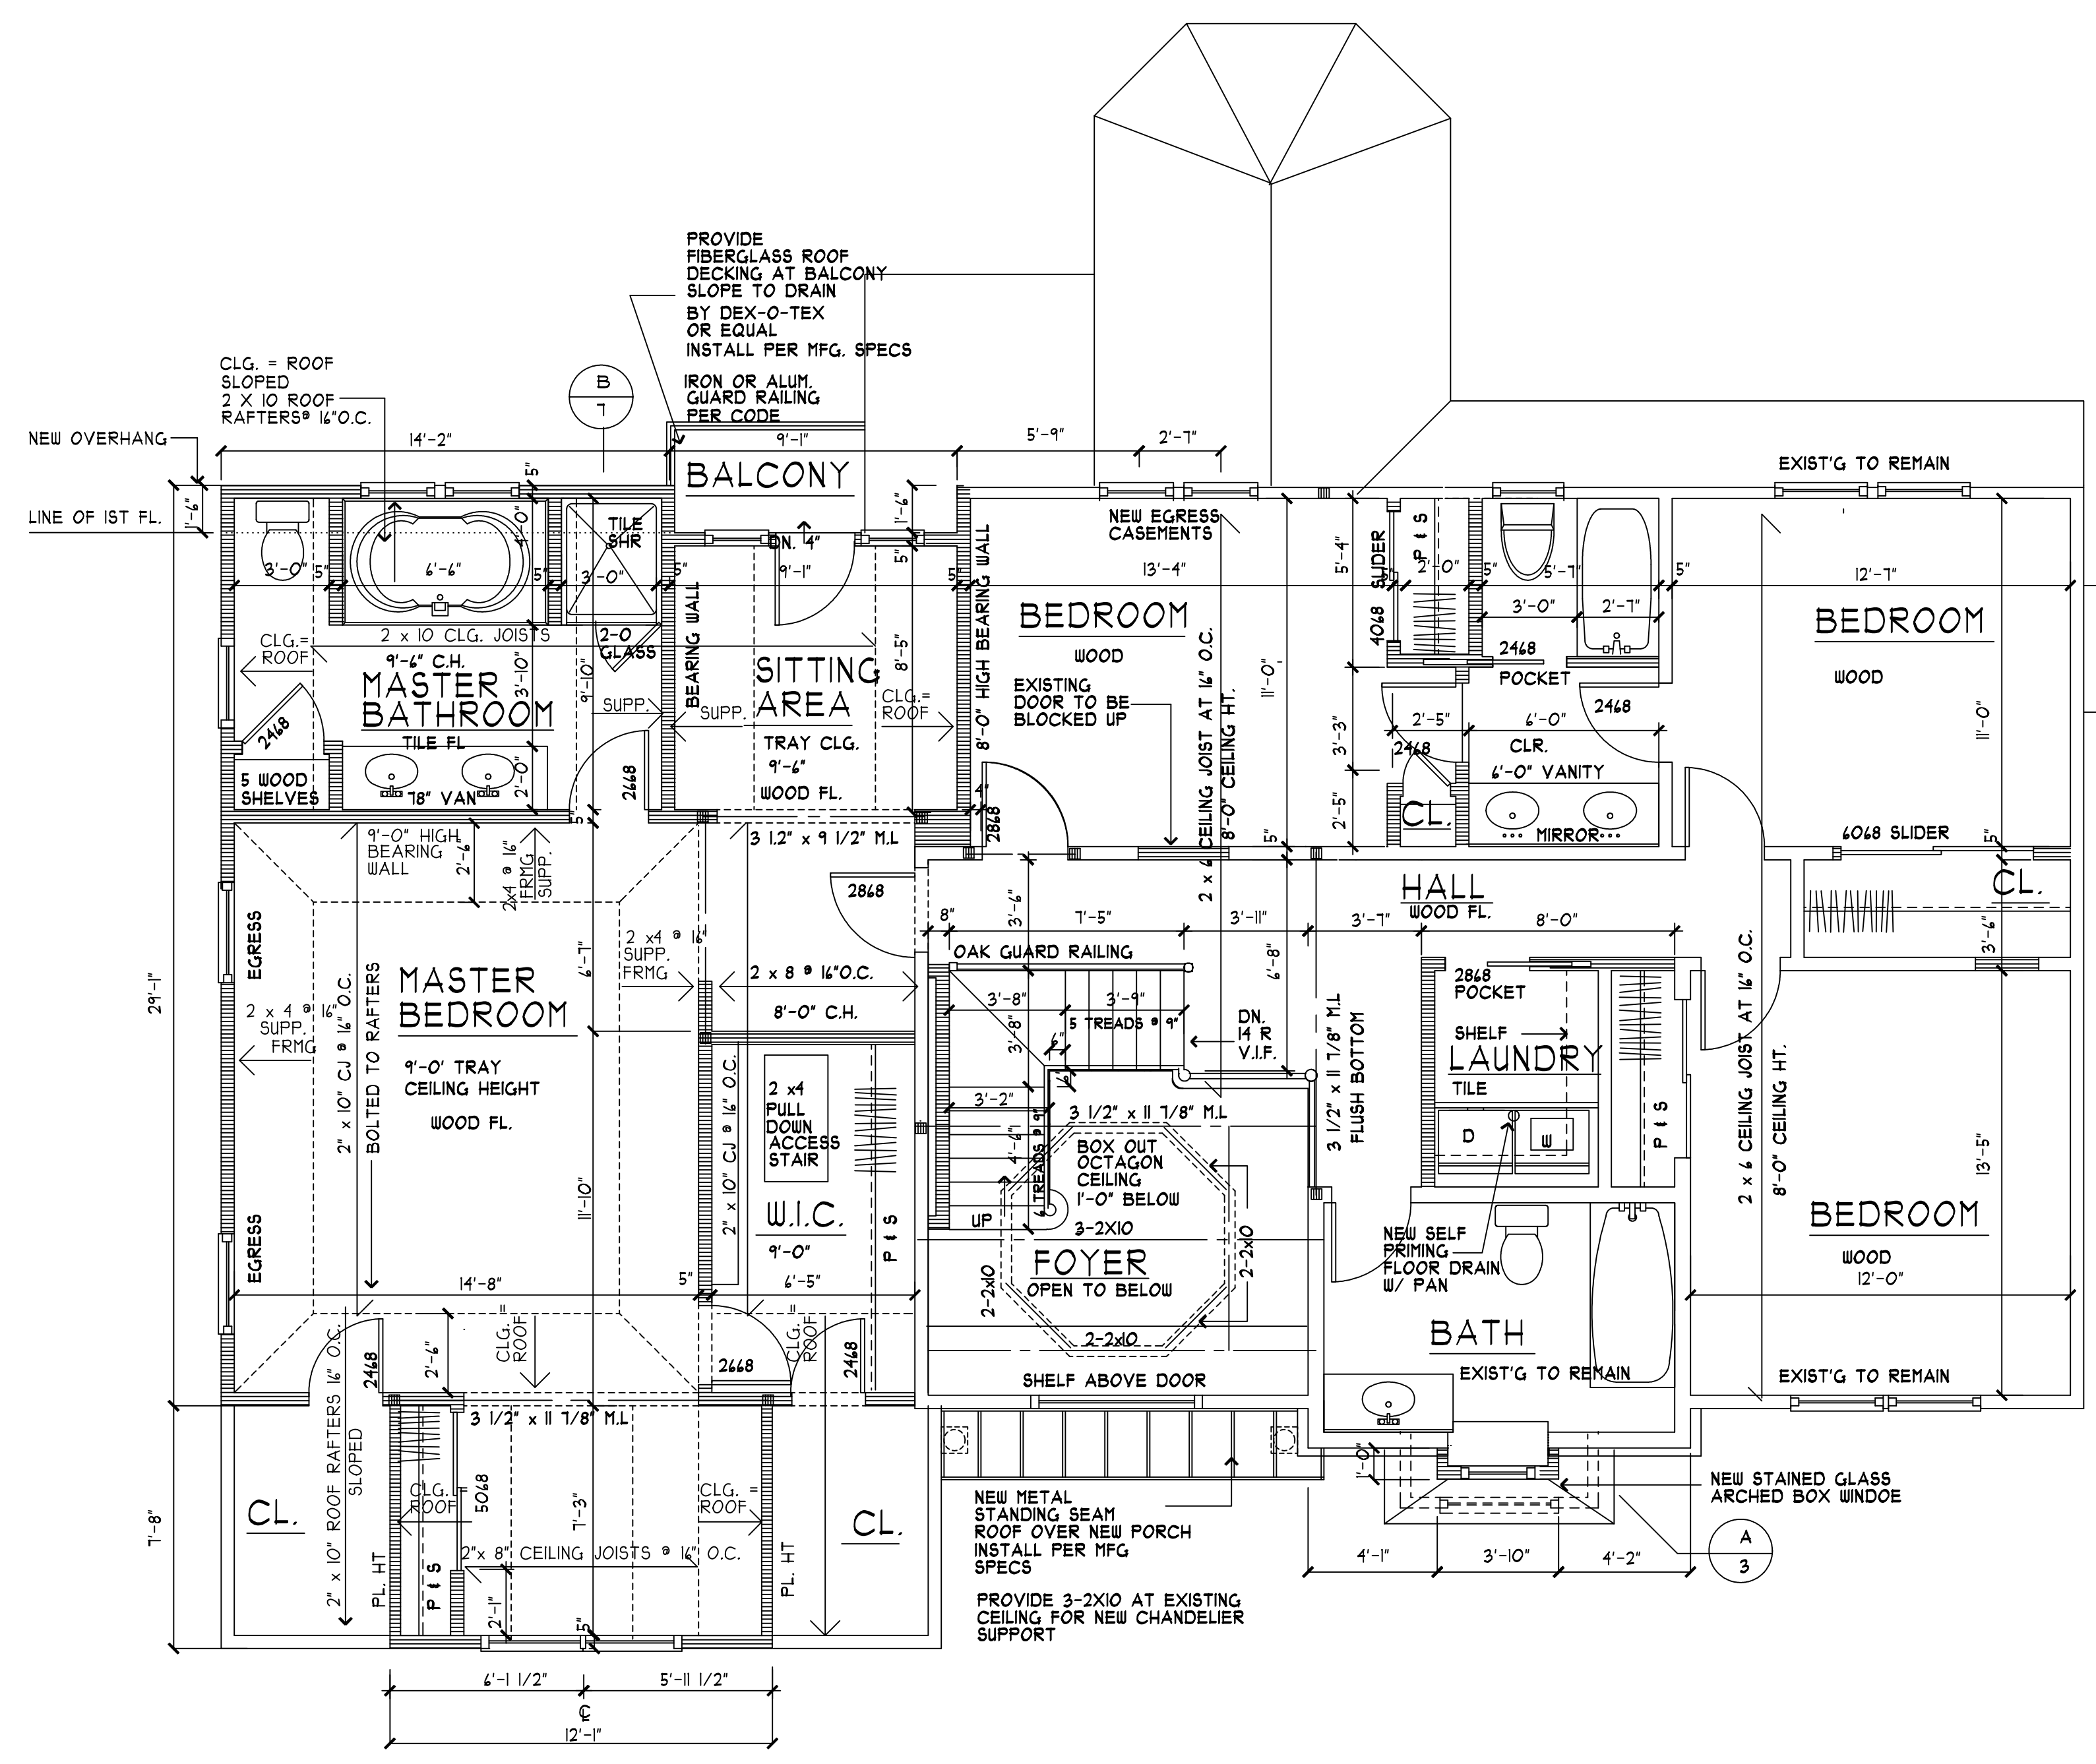

DATE: 07/21/08  
DRAWN/CHECKED: MAS  
SCALE: AS NOTED  
PROJECT NO. 2008  
SHEET NO.